


ML3320/ML3321 DOT MATRIX PRINTER

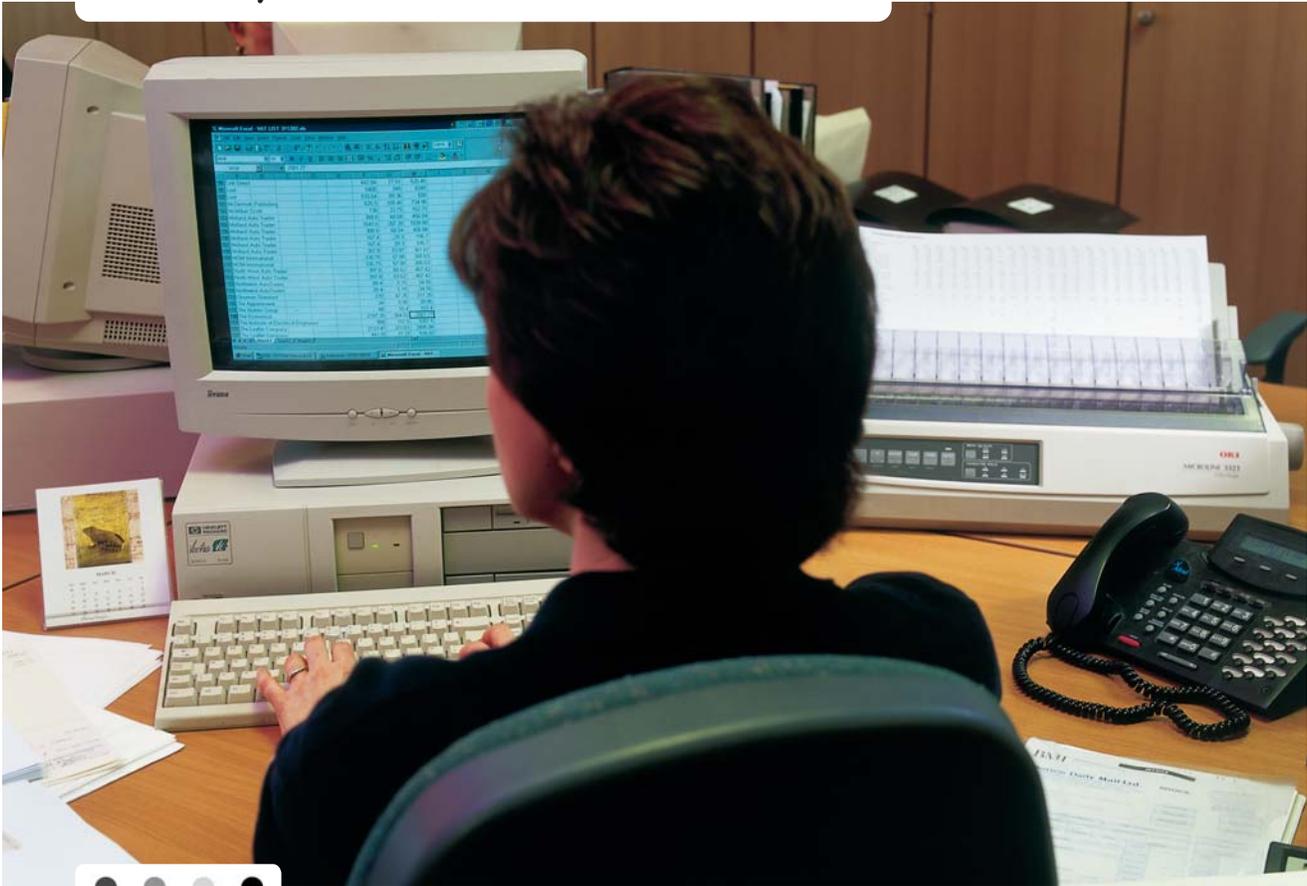

- ❖ ML3320
- ❖ ML3321
- ❖ 9-PIN DOT MATRIX PRINTER

HIGH PERFORMANCE, VERSATILE PRINTER FOR DEDICATED FORMS PRINTING

The ML3320/ML3321 narrow and wide carriage printers are suited to high speed, high volume data and word processing applications where fast throughput and flexible paper management are required. Outstanding reliability, ease-of-use and barcoding facilities make them ideal for customer service points in wholesale, retail and service environments that produce applications.

MAIN FEATURES OF THE ML3320/ML3321 PRINTER

- ❖ 80/136 column dot matrix printers
- ❖ High durability 9-pin print head
- ❖ Up to 435 characters per second print speed
- ❖ Multi-part paper-handling (original + 4 copies)
- ❖ Wide carriage (ML3321) ideal for accounts applications



OKI

ML3320/ML3321 DOT MATRIX PRINTER

PRODUCT SPECIFICATION

| | | ML3320 | ML3321 |
|------------------------------------|---|--|-------------------|
| General | Number of pins | 9 | |
| | No. of multi-part forms | 5 (one original + 4 copies) | |
| Speed & throughput | Super speed (12cpi) | 435cps | |
| | High speed draft (12cpi & 10cpi) | 387cps | |
| | Utility (12cpi & 10cpi) | 290cps | |
| | Near letter quality (12cpi & 10cpi) | 73cps | |
| | Fastest print speed | 435cps | |
| Font & print features | Carriage width (10cpi) | 80 columns | 136 columns |
| | Max. in compressed mode | 160 columns | 272 columns |
| | Character pitch | 10/12/15/17.1/20 pitch & proportional | |
| | Graphics resolution | Up to 240 x 216 dpi | |
| | Typeface & Font | NLQ-Courier (Scalable), NLQ-Gothic (Scalable), OCR-B, High Speed Draft, Utility + Barcodes | |
| | Typestyle | Emphasised, Enhanced, Double Width, Double Height, Italics, Bold, Superscript, Subscript, Underline, Overscore | |
| Emulations & interfaces | Printer emulations | Epson FX, IBM ProPrinter/Graphics, Oki MicroLine | |
| | Standard interfaces | Centronics Parallel + USB | |
| | Optional interfaces | Serial RS 232C/RS 422/Current Loop | |
| Paper-handling | Continuous paper | 76–254mm | 76–406mm |
| | Continuous envelopes | 165 x 91mm | 239 x 102mm |
| | First printable line (from top of page) | 8.9mm | |
| | Standard | Paper parking, Zero tear-off, Autoload single sheet, Push tractors, Bottom feed | |
| | Optional | Pull tractors, Single/dual bin cut-sheet feeder, Roll paper stand (ML3320 only), Bottom tractors with metal long-life tear-off bar | |
| Physical | Dimensions (HxWxD) | 116 x 398 x 345mm | 116 x 552 x 345mm |
| | Weight | 6.5kg | 8.5kg |
| | Memory | 88KB | |
| | Noise level | 57dB(A)/52dB(A) (quiet mode) | |
| Power | Power requirements | 230V AC | |
| | Frequency | 50/60Hz | |
| Reliability | Print head life | 200 million characters | |
| | Ribbon life | 3 million characters in utility mode at 10cpi (re-inking cartridge) | |
| Supplies life | MTBF | 10,000 hours | |

Only use genuine Oki Original consumables to ensure the best quality and performance from your hardware. Non Oki Original products may damage your printer's performance and invalidate your warranty. Specifications subject to change without notice. All trademarks acknowledged.

Oki, Network Solutions
for a Global Society

OKI EUROPE, PART OF OKI ELECTRIC

OKI EUROPE LTD,
CENTRAL HOUSE, BALFOUR ROAD,
HOUNSLOW, MIDDLESEX, TW3 1HY,
UNITED KINGDOM
TEL: +44 (0)20 8219 2190
FAX: +44 (0)20 8219 2199
WWW.OKIEUROPE.COM



As an ENERGY STAR Partner, Oki Europe Ltd has determined that this product meets the ENERGY STAR guidelines for energy efficiency

©2003 Oki Europe Ltd.