


ML3410 DOT MATRIX PRINTER

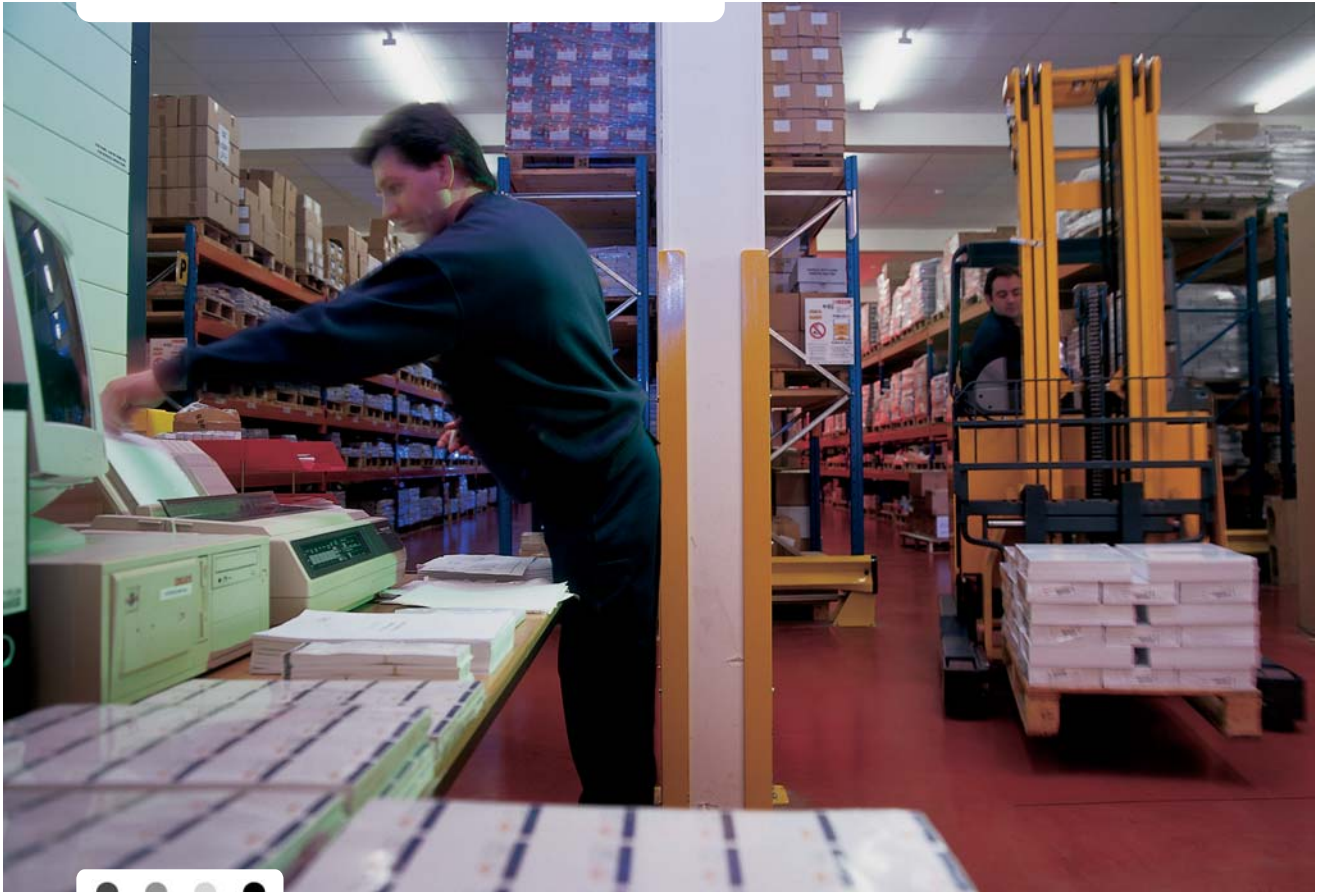

...❖ ML3410 ...❖ 9-PIN DOT MATRIX PRINTER

POWER, RELIABILITY AND VERSATILITY FROM A SINGLE PRINTER

The ML3410 is a powerful dot matrix printer designed to handle the most data-intensive applications at very high speeds. Its copy capabilities are impressive producing up to eight multi-part copies at any one time.

MAIN FEATURES OF THE ML3410 PRINTER

- ...❖ 136 column dot matrix printer
- ...❖ Extremely durable 9-pin print head with Oki reliability built-in as standard
- ...❖ Up to 550 characters per second print speed
- ...❖ Multi-part paper-handling (original + 7 copies)
- ...❖ Ideal for purchasing and distribution, and Accounts, Finance and IT departments that require high speed, high volume printouts



OKI

ML3410 DOT MATRIX PRINTER

PRODUCT SPECIFICATION

| | | ML3410 |
|------------------------------------|--|--|
| General | Number of pins | 9 |
| | No. of multi-part forms | 8 (one original + 7 copies) |
| Speed & throughput | High speed draft (12cpi & 10cpi) | 550cps |
| | Utility (12cpi & 10cpi) | 417cps |
| | Near letter quality (12cpi & 10cpi) | 104cps |
| | Fastest print speed (10cpi) | 550cps |
| Font & print features | Carriage width (10cpi) | 136 columns |
| | Max. in compressed mode | 272 columns |
| | Character pitch | 10/12/15/17.1/20 pitch & proportional |
| | Graphics resolution | Up to 240 x 216 dpi |
| | Typeface & Font | NLQ-Courier, NLQ-Gothic, OCR-B, High Speed Draft, Utility + Barcodes |
| Typestyle | Emphasised, Enhanced, Double Width, Double Height, Italics, Bold, Superscript, Subscript, Underline, Overscore | |
| Emulations & interfaces | Printer emulations | Epson FX, IBM ProPrinter XL or Oki Microline/PM (optional) |
| | Standard interfaces | Centronics Parallel, Serial RS 232C, dual interface |
| Paper-handling | Continuous paper | 76–406mm |
| | Continuous envelopes | 239 x 102mm |
| | First printable line (from top of page) | Cut sheet: 25.4mm Continuous: 23.3mm |
| | Standard | Autoload single sheet, Paper parking, Rear push tractors, Metal long-life tear-off bar |
| | Optional | Single/dual bin sheet feeder, Pull tractor, Bottom power push tractor |
| Physical | Dimensions (HxWxD) | 180 x 570 x 417mm |
| | Weight | 18kg |
| | Memory (Total RAM) | Standard buffer 28KB (reduced buffer) |
| | Noise level (ISO 7779) | <58dB(A) |
| Power | Power requirements | 230V AC |
| | Frequency | 50/60Hz |
| Reliability | Print head life | 200 million characters |
| | Ribbon life | 10 million characters |
| Supplies life | MTBF | 8,000 hours |



Only use genuine Oki Original consumables to ensure the best quality and performance from your hardware. Non Oki Original products may damage your printer's performance and invalidate your warranty. Specifications subject to change without notice. All trademarks acknowledged.

Oki, Network Solutions
for a Global Society

OKI EUROPE, PART OF OKI ELECTRIC

OKI EUROPE LTD,
CENTRAL HOUSE, BALFOUR ROAD,
HOUNSLOW, MIDDLESEX, TW3 1HY,
UNITED KINGDOM
TEL: +44 (0)20 8219 2190
FAX: +44 (0)20 8219 2199
WWW.OKIEUROPE.COM



As an ENERGY STAR Partner, Oki Europe Ltd has determined that this product meets the ENERGY STAR guidelines for energy efficiency

©2003 Oki Europe Ltd.